


# ZKR Comfort

## Base Part Setup Guide

### CAUTION !


If the unit will be installed on a flush mounted box, complete this step first.

First pass the RJ45 cable through the slots in the back. After, Plug the RJ45 socket into place like in Step 2. Install the center orange part with metric #3 screws through the holes on the flush mounted box.

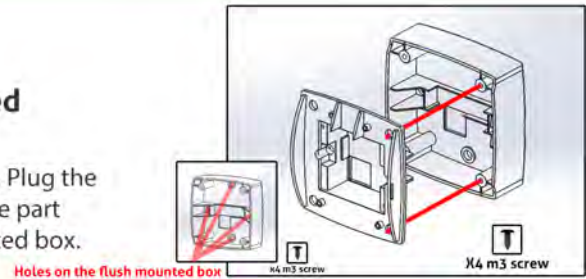



### Step 1

Drill a 7 cm diameter hole on the surface you want to make installation with the drilling saw.




### Step 2

Plug the RJ45 socket to socket behind the center part. (Orange joint part)




### Step 3

Place the product into the hole you drilled before.



### Step 4

Rotate the screws on both sides with a screwdriver. This way claws on the sides will open and stabilize the product.



### Step 5

Place the left part of the top cover first. Place the other part after. While placing the right side stretch the right wing, it will fit easily.

